

RV-M3-M

MURS Band 1-Watt Data Radio Modem

This License-free MURS Data Radio modem is a ½ - 1 watt VHF data modem in module form, designed to easily integrate into OEM products. Perfect for remote control and telemetry applications, it contains a high-performance transceiver with an integrated radio modem.



Product Overview

Unlicensed MURS Channels

The RV-M3-M utilizes the channels designated by the FCC as “Multiple-Used Radio Service” (MURS). The FCC allows unlicensed operation on the 5 MURS channels, with up to 2 watts of RF power output. Products using this module must obtain FCC parts 15 and 95j certification. Raveon can assist you with this.

Very Long Range

With +27dBm transmit power, -117dBm receiver sensitivity, and the superb propagation characteristics of VHF radios, this radio modem will over a ¼ mile in a cluttered environment, and 5+ miles in open areas. It has 6-10X the range of ISM band radio modules.

High-Performance

This product is designed to work reliably in even the harshest environments. Over extreme temperatures, with extraordinary communication range, this data radio modem operates reliably with very little power consumption.

Packet or Streaming

It operates in either a user-configurable “Packet Mode”, with error detection and ARQ error correction, or in a “Streaming Data” mode for low latency. It features user-selectable over the air baud rates of 1200, 2400, or 4800 bps.

Serial Interface

A versatile asynchronous serial interface is utilized for both the user’s data and to configure the data radio modem. Standard AT commands are used to configure it, and user data passes transparently from one modem to another.

Low Power


The RV-M3-M is designed to operate off of any DC power source from 5-8 volts. Current consumption is less than most narrow-band or spread-spectrum radio modems, and power-savings modes allow even lower current consumption.

For More Information

For more information about this or any other Raveon product, call in the U.S.A. 1-760-727-8004 or send an email to sales@raveontech.com.

General Specifications

Input Voltage: 5-8V DC
 Size: 3.55" X 2.1" X .66"
 Frequency Stability:
 Better than ± 5 ppm
 User selectable channels:
 1 151.820 MHz
 2 151.880 MHz
 3 151.940 MHz
 4 154.570 MHz
 5 154.600 MHz
 Serial Port Baud Rates
 300, 1200, 2400, 4800, 9600, 19200,
 38800, or 57600
 Over-the-air baud rates (programmable)
 800, 2400, 4800
 Full Spec Operating Temperature range
 -30°C to +60°C
 TX-RX and RX-TX turn-around time
 <30mS
 Wake-up time from Standby
 <500mS
 Current Draw:
 Standby: <.02mA
 Normal Mode:
 Idling: <60mA
 Receiving data: <60mA
 Transmitting data: <.6A

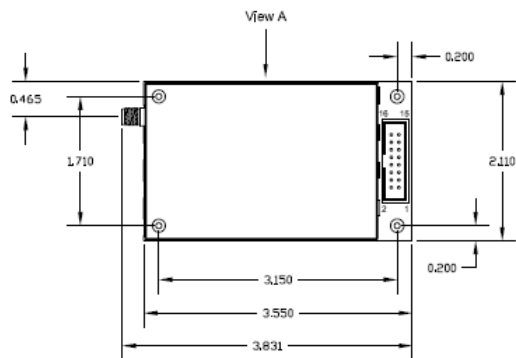

Transmitter Specifications

RF Power Output .5W at 5VDC
 1.0W at 8VDC
 Maximum Duty Cycle 50% at 5VDC
 Maximum Frequency Deviation ± 2.25 kHz
 Occupied bandwidth 11 kHz
 TX Spurious outputs < -65dBc
 Occupied Bandwidth Per FCC

Receiver Specifications

RX sensitivity (1% BER)
 4800bps -113dBm
 2400bps -117dBm
 RX selectivity, adjacent channel -60dB
 RX selectivity, alternate channel -65dB
 RX intermodulation rejection -60dB at
 2400bps
 Image and spurious response -70dB

Interface Specifications

User Interface Port

Connector Type 20-pin 0.100" header
 Voltage Levels 3.3V CMOS
 RX and TX data Async data
 Modem handshake signals RTS, CTS, CD

RF I/O

Connector: SMA (F)

AT Commands

AT commands are available for the following functions:
 Channel Number
 TX timing
 TX packet
 Carrier Detect Operation
 Over-the-air data rate
 Modem Statistics
 Remote Diagnostics
 Address & Address Mask
 Serial port baud rate, parity, stop bits
 Operating Mode: Packets or Streaming

Raveon Technologies Corporation

2780 La Mirada Drive, Suited C Version D2
 Vista, CA 92081
 Phone: +1-760-727-8004
 Fax: +1-760-598-8004

Email: sales@raveontech.com

Copyright Raveon Technologies Corp, 2006
 All rights reserved
 Printed in the USA