

RV-M7-UB

M7 UHF Band ½ - 5 watt Data Radio

The M7 UHF data transceiver is a rugged ½ - 5 watt UHF data radio modem with an RS-232 (or optional 422/485) serial interface, ideal for SCADA and telemetry applications.



Product Overview

Long-Range Operation

Operating in the UHF 419-440MHz frequency band, the RV-M7 radio modem works over 50 miles point-to-point and many miles with omnidirectional antennas. All RV-M7 modems support store-and-forward repeating for wide-area coverage.

Fast Polling

The M7 transceiver has a 3mS PLL in it, making it one of the fastest telemetry radios available, especially well suited for polled, DNP and MODBUS applications.

High Speed and High Efficiency

The RV-M7 operates with user-selectable over-the-air data rates of 1200 to 19200bps. Faster rates for higher efficiency or lower-speed for increased communication range. Its fast-switching radio enables it to send up to 50 transmissions per second.

Very Low Power Consumption

The advanced UHF transceiver is integrated with a powerful 16-bit microprocessor-based modem in one easy-to-mount package. It has very low power consumption, and sleep modes that allow it to be active and consume almost no power at all.

Fully Programmable

It is configured with a serial connection using industry-standard AT commands. Parameters such as network IDs, unit ID and transmission rate are easily configured. Raveon also provides a PC program called "[Radio Manager](#)" that makes configuring the M7 fast and easy.

OTA Configuration

The ID of a particular transponder and certain system parameters such as report rate may be configured Over-The-Air, without having to physically connect to the unit.

Real-time diagnostics and statistics

Channel performance, RSSI, RF power, packet counters, and radio configuration are easily accessed via the serial port or remotely over-the-air. An *Auto-Status* feature enables the RV-M7 to periodically report its status and DC voltage.

Rugged and Weather Proof Options

The RV-M7 is available with optional 'weather proof' IP65 (NEMA 4) rated connections and enclosure. All models include protection against damage from over-temperature, high VSWR, and reverse voltage.

Flexible Addressing and Error Correction

The RV-M7 uses a 16 bit address with a 16 bit network mask, allowing for many devices to be co-located without receiving each other, as well as the creation of sophisticated network topologies.

GPS Option


The optional on-board GPS allows the RV-M7 to be a powerful Automatic Vehicle Locating (AVL) system or Time Space Position Information (TSPI) reporting device. For details see: http://www.raveon.com/rv_m7GX.html

For More Information

For more information about this or any other Raveon product, call in the U.S.A. 1-760-444-5995 or visit www.raveon.com.

General Specifications

Size:
4.60" X 2.60" X .956 (11.7cm X 6.6cm X 2.43cm)

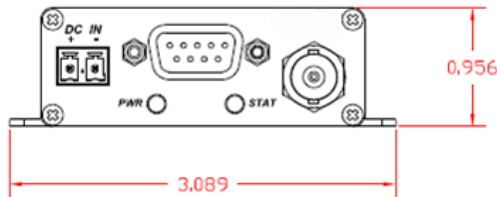

Weight:
6 oz

Input Voltage:
9.5 – 16 VDC

Current draw:
Receiving data: <90mA,
Transmitting data:
(2.7A @ 5w, 1.2A @ 2W typical)
Sleep (<25mA)

Standard Frequency Band:
B 419-440MHz

Serial Port Baud Rates (programmable)
1.2k, 2.4k, 4.8k, 9.6k, 19.2k, 38.4k, 57.6k, 115.2k

Over-the-air baud rates (programmable)
-N 1200, 2000, 2400, 4.8k, 5142, 8K,9.6k
-W 1200, 2000, 2400, 4.8k, 8k, 9.6k, 19.2k

Operating Mode
Simplex or Half-duplex

Full Spec Operating Temperature range
-30°C to +60°C

TX-RX and RX-TX turn-around time
<3mS

Wake-up time
<500mS from OFF
<5mS from Sleep

Front Panel LEDs
Power, Status (Carr Det, TX, mode...)

RF I/O Connector
BNC (Female)

Power Cable
Raveon P/N: RT-CB-H1

Addressing
Individual address: 65,536

Options:
On-board GPS -GX option
IP65-rated ("waterproof") -WX option
RS422/485 option -4 option

Maximum Duty Cycle.....100% @ 2W to 40C, 25% @5W
(100% w/ optional heat-sink)
Frequency Deviation ± 2.2kHz (-N) ± 3.5kHz (-
W)
RF Bandwidth.....20MHz no-tune
Occupied bandwidth..... 11 kHz (-N) 16kHz(-W)
TX Spurious outputs..... < -70dBc
Channel Spacing 25KHz
FCC Emissions Designator..... 11K0F1D (-N)
Frequency Stability Better than ±1.5ppm

Receiver Specifications

RX sensitivity (.1% BER)..... 4800bps < -116dB
1200 & 2400baud..... Contact Factory
RF No-tune bandwidth 20MHz
Adjacent Channel Selectivity -50dB
Alternate Channel Selectivity -65dB
Blocking and spurious rejection..... -75dB
RX intermodulation rejection..... -70dB

Interface Specifications

Serial Interface Port

Connector Type	DB-9
IO Voltage Levels	RS-232, RS-485, RS-422 (user selectable)
RX and TX data	Transparent Async.
Word length	7 or 8 bits
Format	N, O, or E
Modem handshake signals	RTS, CTS, CD

Selected Configuration Options

- Channel Number and Operating Frequency
- Carrier Detect Operation
- Modem Statistics
- Power-savings modes
- Unit Address and Destination address
- Network Address Mask
- ARQ error correction on/off
- Baud Rate, parity, stop bits
- Select Packet or Streaming mode of data transmission
- Store-and-forward Repeating configuration
- Busy-channel lock-out
- Hardware flow control operation
- LEDs operation or disabled
- Auto Status report on/off and interval.
- Read DC voltage, current, forward RF power, VSWR
- Remote PING

For a complete feature list see the technical manual here:
<http://www.raveon.com/support.html>

Transmitter Specifications

RF Power Output 500mW – 5.0 W programmable

Raveon Technologies Corporation

2320 Cousteau Court
Vista, CA 92081
Phone: +1-760-444-5995
Fax: +1-760-444-5997

Email: sales@raveon.com

Copyright Raveon Technologies Corp, 2012
All rights reserved

Version C3. Printed in the USA